
TRAVEL

団

<u>0</u>2




FEATURE-S



Solid oak cabinet doors with hand: crafted decorative glass is featured in the living area of most models.



Color coordinated bedspreads and pillow shams are standard in all models with fixed beds.



Standard Interior Features:

shades. Mini blind in kitchen, marine toilet, window drapes and valance with black out roller bedspreads, pillow shams and pillows. Decorative with washable vinyl backs. Color coordinated water heater. Tuffed 5" high density foam cushions with Shur-Flo® pump and 6 gallon LPG / 110 volt bath 110 volt receptacles. Demand water system battery charger. Ground fault protected kitchen and travel locks. Large power converter with built-in models. All wood drawers with center guides and heat ducting system, except models 165T & 175T upon model selection. Space saving "in-the-floor Hydro-Flame® furnace, 17 - 30,000 BTU depending exhaust and light. Pilotless electronic ignition Style LPG range and oven, range hood with power models 255T and larger. 3 burner high output Euroelectric Dometic® refrigerator, two door refrigerator raised panel laminated cabinet doors. Large gas cabinets teaturing positive locking hardware and Vinyl covered wood paneling, radius style type 100% nylon Scotchgard® treated velour upholstery Large double basın porcelain sınk, with cover, most

recessed fire extinguisher, power exhaust fan in bathroom. Seamless no-wax vinyl floor covering. Carpeting in living room, selected models. Home-type innerspring mattress in all models, except 165T & 175T. AM-FM cassette stereo with 4 speakers and antenna, systems monitor panel, water heater bypass, TV antenna, antenna booster and park cable TV hook-up. One piece tub/shower surround, most models.

Standard Exterior Features:


with baked enamel finish, stone shield, radius design front travel awning, large tubular steel main frame not "C" channel, seamless Polymax® underbelly. 2" x 3" wood floor framing (except 165T & 175T) with seamless wood sub floor. Georgia Pacific® fiberglass insulation (ceiling, walls, floor) metal reinforced joints, 2" x 3" tapered roof rafters (2" x 4" with ceiling ducted air conditioner), pre-framed and wired for roof air conditioner, most models. Wide track tandem axles, Goodyear® radial tires, color-coordinated mag type wheels, electric brakes on all wheels. Two 30 lb. LPG bottles with automatic change


regulator, molded LPG bottle cover, except 165T & 175T. Dual holding tanks, 25 foot power cord, 30 amp rated. Campsite water hookup, radius frame outside baggage door(s), patio light, hitch light, and hookup light. Large radius corner black frame Hehr® jalousie type windows with tinted glass and removable screens. Two tier self-storing entrance steps, most models. Sewer hose storage in bumper. Outside receptacle - ground fault protected. 12 volt fuse panel, breakaway brake switch and dual safety chains. Adjustable front jack and dolly wheel, flush mount entrance door handle(s) with integrated dead bolt lock(s). Exterior shower, most models.

Optional Features:


Magic Chef® electronic touch microwave oven, Duo Therm® ceiling ducted air conditioner. A&E® 8500 series side awning, spare tire, tire carrier and cover, safety glass, storm windows, battery and case, built-in stabilizer jacks, deluxe rocker chair, and thermo ply insulation, most models.

Z \triangleright $\bar{\mathbf{z}}$ Ō

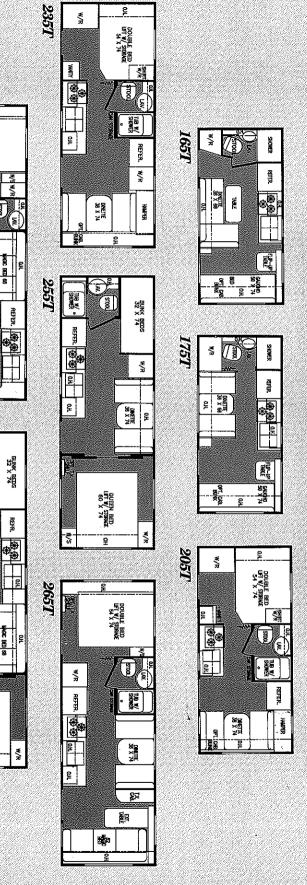



275T

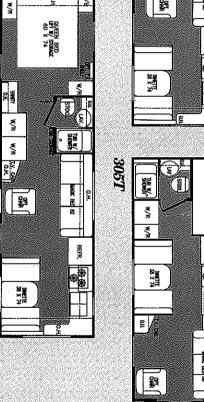

OUEEN BED UT #/ STORAGE 60 × 7.4

Ę



315T




00

SPECIFICATIONS

1.	[8898]	800] [200] [600] [800] Beech														
LP Gas	Converter W/ Charger	Floor Ducted	Electronic Ignition LPG Furnace (BTU)	Black/Gray Holding Tanks (gal)	Demand Water System	Sleeping Capacity	Hitch Height	Tire Size	Gross Vehicle Weight Rating	Axle Weight	Hitch Weight	Interior Height	Overall Height	Overall Width	Overall Length	Models
2 - 20#	S		17,000	12/30	34 Gals.	4	17"	205/15C ·	3500	2400	300	6'3"	8'1"	7'2" .	17'8"	165T
2 - 20#	S	I	17,000	12/30	34 Gals.	4	14"	185/13B ·	3700	2400	350	6'3"	711"	7'2"	17'11"	175T
2 - 30#	S	S	20,000	30/40	36 Gals.	4	17"	205/15B	4800	3275	350	6'6"	8'10"	7'11"	20'6"	205T
2 - 30#	S	S	25,000	30/40	36 Gals.	4	17"	205/15B	5000	3700	375	6'6"	8'10"	711"	23'6"	235T
2 - 30#	S	S	25,000	30/40	36 Gals.	6	17"	205/15C	5700	3925	450	6'6"	8'10"	711"	25'11"	255T
2 - 30#	S	S	25,000	30/40	36 Gals.	6	17"	205/15C	5900	4050	550	6'6"	8'10"	7'11"	26'11"	265T
2 - 30#	S	S	25,000	30/40	36 Gals.	6	17"	205/15C	6000	4250	400	6'6"	8'10"	7'11"	27'8"	275T
2 - 30#	S	ß	30,000	30/40	36 Gals.	8	18"	205/15C	6800	4350	600	6'6"	8'10"	7'11"	30'11"	305T .
2 - 30#	ß	S	30,000	30/40	34 Gals.	6	18"	205/15C	7000	4650	500	6'6"	8'10"	7'11"	31'10"	315T

Specifications comply with Federal Motor Vehicle Standards and RVIA Standards. Due to continuous product improvement, specifications subject to change without notice and incurring obligations. **Listed weights are approximate and are based on standard equipment. Depending upon construction materials weight may vary ± 10%.

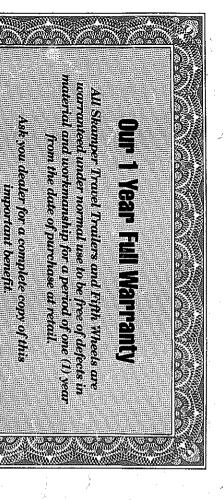





P.O. Box 338, Bristol, IN 46507