
DUTCHMEN CLASSIC GL





CLASSIC LOOKS. CLASSIC QUALITY. CLASSIC VALUE.

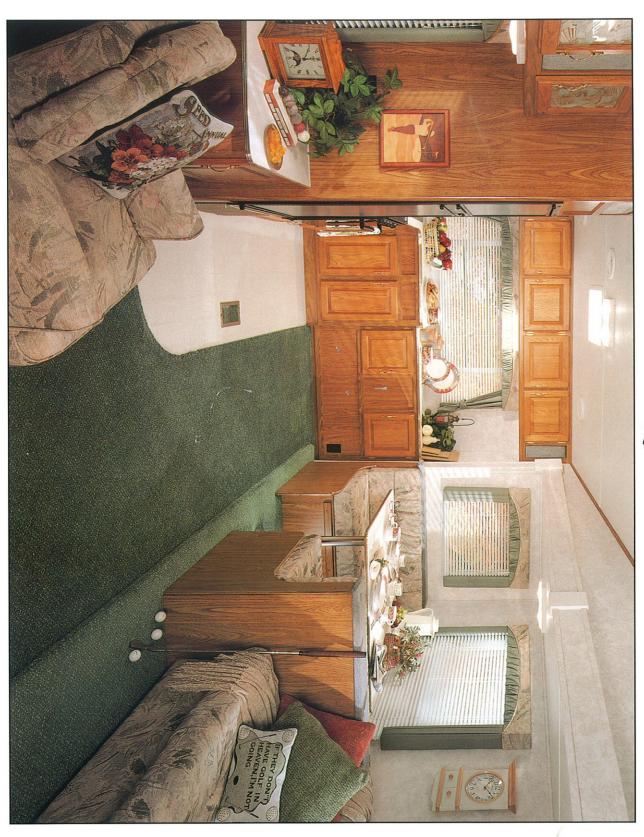

DUTCHMEN CLASSIC GL

and trim. Of course, the GL is matching white window frames smooth-finished entry door and enhanced even further by its without adding excess weight. sidewalls and end caps make the laminated gloss fiberglass level. Thermo-compression fullythat have made Dutchmen travel loaded with the standard features And the GL's beautiful exterior is maintain, while aluminum fram-GL strong, durable and easy to Dutchmen excellence to a new favorite with RVers, the GL carries trailers and fifth wheels such a With all of the quality and value that make Dutchmen RVs such ing gives even more strength

DUTCHMEN'S AROUND THE CLOCK CUSTOMER CARE

With your new Dutchmen GL, you receive a complimentary one-year membership DUTCHMEN COMMENT COMP SOLUTION COMPANY COMP

Manufacturing's 1-580-5993-7993
Customer Care Program. As a member, you have access to roadside assistance through a toll-free number anywhere in the U.S. and Canada. Our staff is available 24 hours a day, 365 days a year to provide information on over 6,800 pre-qualified service locations and to dispatch emergency road service or towing help.



with oven and high-Classic GL a truly throughout give your drawer fronts cabinet doors and solid oak raised-panel microwave. Beautiful, large, residential double sink, and care stainless steel output burner, easythree-burner range ble-door refrigerator, include a large douquality appliances you'll need. Highutensils and groceries it easy to carry all the and overheads make while large cupboards plenty of work space, kitchens give you Carefully planned


Island queen beds with quality innerspring mattresses (twin beds are

storage area. nights. Heavy-duty lifters provide safe, easy access to the under-bed available on many models, if you prefer) give you comfortable, restful



Dutchmen

TRAVEL TRAILERS

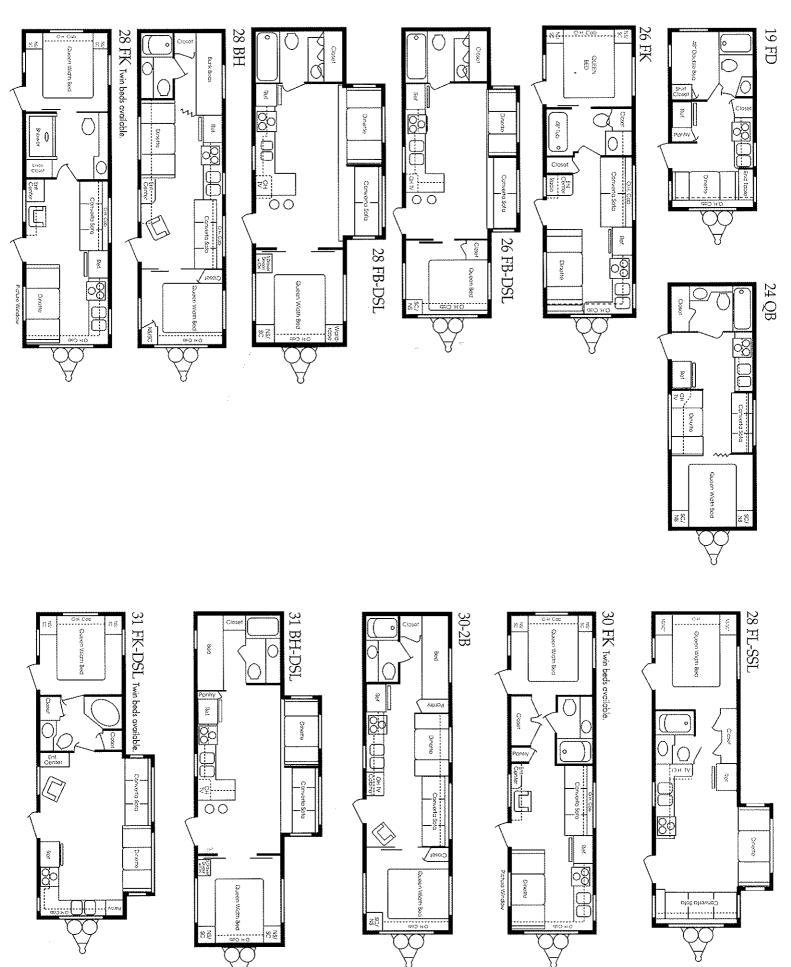

FIFTH WHEELS



DUI CHMEN 1998 CLASSIC GE	A ISSA	CLA	DOIC G	Ī																
	19 FD	24 QB	26 FB-DSL	26 FK	28FB-DSL	28 BH	28 FK	28 FL-SSL	30 FK	30-2B	31 BH-DSL	31FK-DSL	27 RK-2	26 CK SSI-2 FW	26 CK 27 RK	27RK-SL	30 RK-SL	30 BH-SL	30 RL-SL	35 2B-SL
Length	19'11"	24'11"	26'11"	26'11"	28'11"	28'11"	28'11"	28'11"	30'11"	30'11"	31'11"	31'11"	28'2"	27'2"	28'2"	28'2"	31'2"	31'2"	31'2"	36'2"
Width w/o Awning	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"
Hitch Dry Weight	560	N/A	580	N/A	N _A	700	680	800	860	460	600	1,380	1,100	1,120	1,340	1,200	1,560	1,340	1,560	1,820
Axle Dry Weight	3,320	N/A	5,280	N/A	NA	4,480	4,220	4,920	4,440	5,160	5,820	5,680	4,640	5,420	5,640	5,800	5,880	5,980	5,880	6,520
GVWR	7,560	N/A	7,580	N/A	NA	7,700	7,680	7,800	7,860	7,460	9,400	10,180	9,900	8,120	10,140	10,000	10,360	10,140	10,360	10,620
WVU	3,880	N/A	5,860	N/A	NA A	5,180	4,900	5,720	5,260	5,620	6,420	7,060	5,740	6,540	6,980	7,000	7,440	7,320	7,440	8,340
NCC	3,680	N/A	1,720	N/A	N _A	2,520	2,780	2,080	2,600	1,840	2,980	3,120	4,160	1,580	3,160	3,000	2,920	2,820	2,920	2,280
Radial Tire Size	ST205 75R15	ST205 75R15	ST225 75R15	ST205 75R15	ST225 75R15	ST205 75R15	ST205 75R15	ST205 75R15	ST205 75R15	ST205 75R15	ST225 75R15	ST225 75R15	ST205 75R15	ST225 75R15	ST225 75R15	ST225 75R15	ST225 75R15	ST225 75R15	ST225 75R15	ST225 75R15
Tire Load Range	0	C	0	C	0	C	C	0	C	0	D	D	0	C	C	D	D	D	D	D
Dual Waste Water	60	60	60	60	60	60	60	60	60	60	60	90	60	60	90	90	90	60	60	120
Fresh Water	30	30	30	30	60	30	30	30	30	30	30	30	30	30	30	30	30	30	30	90
Furnace BTU	20M	25M	31M	25M	31M	31M	31M	31M	31M	31M	35M	31M	25M	31M	31M	31M	31M	31M	31M	35M

Note: Weights include air/awning/microwave and 30-lb bottle

Standard Features

CONSTRUCTION

- Two year structural and major component warranty
- Z-Bond (laminated) %" exterior underbelly grade tongue and groove plywood floor with aluminum LP tank capacity 30# with cover Patio light by entry door & automatic change-over
- tramed side and end walls Z-Bond (laminated) aluminum

Smooth fiberglass exterior

Smooth finish entry doors

30" Entry door (where applicable)

All trames are cambered

rear door

- 30-amp power corc
- 45-amp convertor

Automotive style fender skirt

linted radius clamp

ring windows

 Aluminum bumper cover Radius cabinet stiles

 %" wood roof decking full length of coach

CONSTRUCTION

- No putty tape—Butyl rubber silicon caulk, and imported CONSTRUCTION Dicor Corp. Brite-ply[®] seamless EPDM roof covering with fire retardant and 12-year warranty
- Rear rock guard
- TV antenna with booster
- Large jalousie windows Cable TV hook-up

Double entry step at main

entrance door, single at

- In-floor heat ducting

APPLIANCES

- AM/FM stereo cassette w/ 4 speakers
- 13.5M BTU ducted roof air

APPLIANCES

- 6-gallon gas/electric water thermostat heater with autolite & adjustable
- Combination range hood/ monitor panel
- Large double-door 8 cu. ft. retrigerator
- Large microwave w/carousel
- Color-coordinated roll-out side on 21' awnings) awning (center support included
- 3-burner range/oven with high BTU output burner

INTERIOR

exterior storage include generous Dutchmen Classic GL's

Swivel rocker and/or bar stools

Bathroom skylight

- Solid oak raised panel cabinet (N/A on rear bath models)
- Color coordinated padded beddoor and drawers
- Laminated dinette seat

room headboard

- Large mirrored medicine cabinet
- Bi-fold shower door 30 oz. new stain resistant
- Lamberquin window treatments polypropylene carpet

compartments for even extra-large forward compartment doors, so greater capacity. you can take along travel. Fifth wheels have those extras when you

THOR'S "2+2" WARRANTY

The best protection in the RV Industry! 2 year limited structural warranty and 2 years on major components

See your dealer for all the details




Vehicle Loading—Every effort has been made to provide the greatest number of options for the recreation vehicle owner. Along with these choices comes the responsibility to manage the loads that are imposed by the choices so that they remain within the manufacturer's specified chassis weight limits. Do not overload the recreation vehicle.

options and cargo. Liquid capacities and weights are approximations only. Dry weights based on standard features; optional equipment not included. Net carrying capacity (NCC) determined by subtracting unloaded vehicle weight (UVW) from gross vehicle weight (GVWR) and includes fluids,



DUTCHMEN MANUFACTURING 305 Steury Ave • Goshen, IN 46526 219-534-1224



This brochure is printed on recycled paper as part of Thor's corporate effort to minimize waste and conserve our natural resources. We know you will join us in this effort to maintain North America's great outdoors. For who appreciates

the natural beauty of our open spaces more than an RV'er?