
FOUR WINDS LS



Looks, Quality, Value.

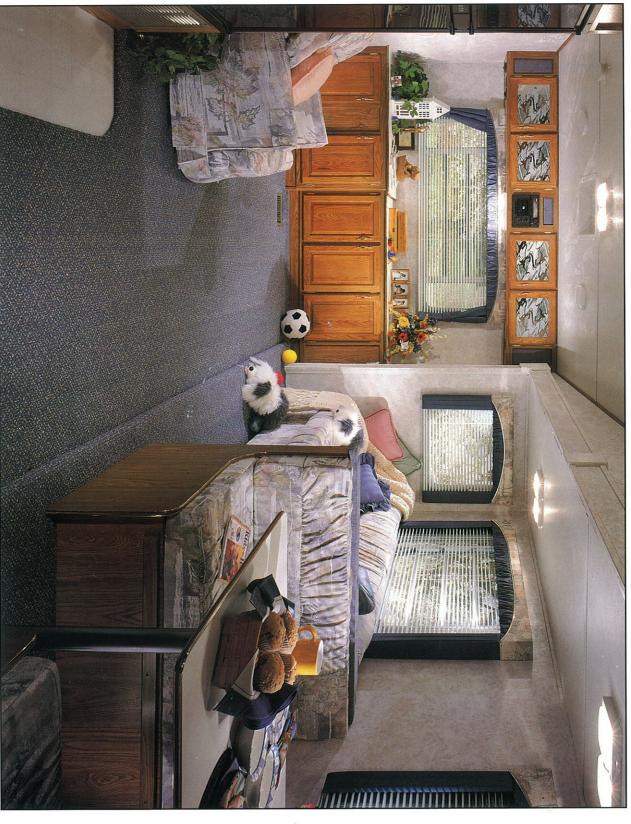

FOUR WINDS LS

ed gloss fiberglass sidewalls and such a favorite with RVers, the end caps make the LS strong, excellence to a new level. Therthat have made Four Winds RVs such great value. matching white window frames smooth-finished entry door and enhanced even further by its adding excess weight. And the even more strength without while aluminum framing gives durable and easy to maintain, mo-compression fully-laminat-LS carries Four Winds travel trailers and fifth wheels With all of the quality and value and trim. Of course, the LS is features that make Four Winds loaded with the standard LS's beautiful exterior is

FOUR WINDS' AROUND THE CLOCK CUSTOMER CARE

With your new Four Winds LS, you receive a

Four Winds
Customer Care Roadside Andstance
John and Jone Smith
1-800-999-7993

complimentary one-year

membership in

Four Winds Manufacturing's
Customer Care Program. As a member, you have access to roadside assistance through a toll-free number anywhere in the U.S. and Canada. Our staff is available 24 hours a day, 365 days a year to provide information on over 6,800 pre-qualified service locations and to dispatch emergency road service or towing help.

TRAVEL TRAILERS



FIFTH WHEELS





solid oak raised-panel throughout give your utensils and groceries microwave. Beautiful output burner, easywith oven and highit easy to carry all the and overheads make while large cupboards ble-door refrigerator, include a large douplenty of work space,

storage area. nights. Heavy-duty lifters provide safe, easy access to the under-bed available on many models, if you prefer) give you comfortable, restful Island queen beds with quality innerspring mattresses (twin beds are



FOUR WINDS LS 1998	S L'S	REGI																		
	19 FD	24 QB	26 FB-DSL	26 FK	28FB-DSL	28 BH	28 採	28 FL-SSL Π	3 7 7	30-2B	31 BH-DSL	31FK-DSL	27 RK-2 FW	26 CK 27 RK SSL-2 FW LSM-2 FW	27 RK LSM-2 FW	27RK-SL FW	30 RK-SL FW	30 BH-SL FW	30 RL-SL FW	35 2B-SL FW
lenath	19'11"	24'11"	=	26'11"	28'11"	28'11"	28'11"	28'11"	30'11"	30'11"	31'11"	31'11"	28'2"	27'2"	28'2"	28'2"	31'2"	31'2"	31'2"	36'2"
Width w/o Awning	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"	96"
Hitch Dry Weight	560	N/A	580	N/A	Z A	700	680	800	860	460	600	1,380	1,100	1,120	1,340	1,200	1,560	1,340	1,560	1,820
Axle Dry Weight	3,320	N/A	5,280	N/A	N _A	4,480	4,220	4,920	4,440	5,160	5,820	5,680	4,640	5,420	5,640	5,800	5,880	5,980	5,880	6,520
GVWR	7,560	N/A	7,580	N/A	N _A	7,700	7,680	7,800	7,860	7,460	9,400	10,180	9,900	8,120	10,140	10,000	10,360	10,140	10,360	10,620
WWU	3,880	N/A	5,860	N/A	NA	5,180	4,900	5,720	5,260	5,620	6,420	7,060	5,740	6,540	6,980	7,000	7,440	7,320	7,440	8,340
NCC	3,680	N/A	1,720	N/A	N _A	2,520	2,780	2,080	2,600	1,840	2,980	3,120	4,160	1,580	3,160	3,000	2,920	2,820	2,920	2,280
Radial Tire Size	ST205 75R15	ST205 75R15	ST225 75R15	ST205 75R15	ST225 75R15	ST205 75R15	ST205 75R15	ST205 75R15	ST205 75R15	ST205 75R15	ST225 75R15	ST225 75R15	ST205 75R15	ST225 75R15	ST225 75R15	ST225 75R15	ST225 75R15	ST225 75R15	ST225 75R15	ST225 75R15
Tire Load Range	С	C	С	0	0	C	0	0	C	0	D	D	C	0	0	D	D	D	D	D
Dual Waste Water	60	60	60	60	60 1	60	60	60	60	60	60	90	60	60	90	90	90	60	66	120
Fresh Water	30	30	30	30	60	30	30	30	30	30	30	30	30	30	30	30	30	30	30	90
Furnace BTU	20M	25M	31M	25M	31M	31M	31M	31M	31M	31M	35M	31M	25M	31M	31M	31M	31M	31M	31M	35M

Note: Weights include air/awning/microwave and 30-lb bottle

Standard Features

CONSTRUCTION Two year structural and major component warranty

- Z-Bond (laminated) 5/8" exterior underbelly plywood floor with aluminum grade tongue and groove
- Z-Bond (laminated) aluminum tramed side and end walls

Smooth fiberglass exterior

- Radius cabinet stiles Smooth finish entry doors 30" Entry door (where applicable) All frames are cambered
- 30-amp power cord
- 45-amp convertor

¾" wood roof decking full

length of coach

- Automotive style fender skirt Aluminum bumper cover
- ring windows

CONSTRUCTION

CONSTRUCTION

 No putty tape—Butyl rubber, silicon caulk, and imported

EPDM roof covering with fire retardant and 12-year warranty Dicor Corp. Brite-ply seamless

- Patio light by entry door
- LP tank capacity 30# with cover TV antenna with booster Rear rock guard
- Cable TV hook-up Large jalousie windows

 Double entry step at main entrance door, single at

& automatic change-over

- In-floor heat ducting
- Hitch light

APPLIANCES

- AM/FM stereo cassette w/ 4 speakers
- 13.5M BTU ducted roof air

APPLIANCES

- 6-gallon gas/electric water thermostat heater with autolite & adjustable
- monitor panel Combination range hood/
- Large double-door 8 cu. ft. Large microwave retrigerator
- Color-coordinated roll-out side on 21' awnings) awning (center support included w/carousel
- 3-burner range/oven with high BTU output burner

INTERIOR

 Swivel rocker and/or bar stools with applicable


> so you can take along age compartment doors, generous exterior stor-Four Winds LS includes

- Bathroom skylight (N/A on rear bath models)
- Solid oak raised panel cabinet door and drawers
- Color coordinated padded bedroom headboard
- Large mirrored medicine cabinet Laminated dinette seat
- Bi-fold shower door
- 30 oz. new stain resistant Lamberquin window treatments polypropylene carpet

THOR'S "2+2" WARRANTY

greater capacity. compartments for even extra-large forward travel. Fifth wheels have those extras when you

The best protection in the RV Industry! 2 year limited structural warranty and 2 years on major components See your dealer for all the details



by the choices so that they remain within the manufacturer's specified chassis weight limits. Do not overload the recreation vehicle. Vehicle Loading—Every effort has been made to provide the greatest number of options for the recreation vehicle owner. Along with these choices comes the responsibility to manage the loads that are imposed

Dry weights based on standard features; optional equipment not included. Net carrying capacity (NCC) determined by subtracting unloaded vehicle weight (UVW) from gross vehicle weight (GVWR) and includes fluids, options and cargo. Liquid capacities and weights are approximations only

Warning: This information is intended as a guide only. Weights of individual vehicles may vary. Consult your



219-534-1224





