



1999 Aerolite Eight and SE Fifth Wheels

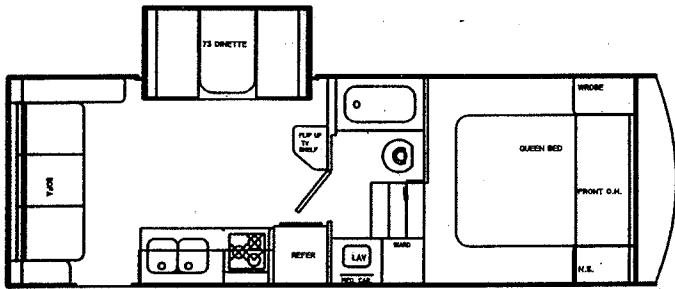

8524SLD

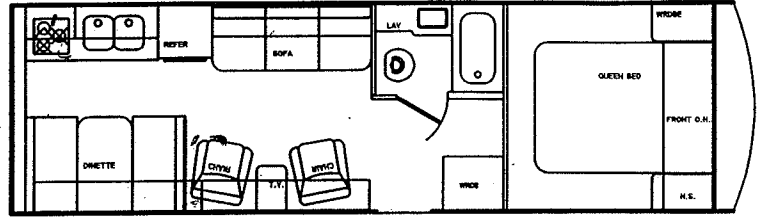


8527RK

Specifications Travel Trailers & Fifth Wheels

	8 2 4 F B R	8 2 4 R Q S	8 2 6 R Q S	8 2 6 F D B	8 2 8 F D B	8 2 8 F D K	8 3 0 R Q S	8 3 0 R F D B	8 3 0 F K	8 5 2 4 S L D	8 5 2 7 R K	
Length	26'6"	26'6"	26'6"	26'6"	28'6"	28'6"	28'6"	30'6"	30'6"	30'6"	24'3"	27'3"
Exterior Width	8'	8'	8'	8'	8'	8'	8'	8'	8'	8'	8'	8'
Exterior Roof Height	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	8'3"	9'5"	9'5"
GVWR (lbs.)	5000	5000	5000	5000	5500	5500	5500	5500	5500	5500	6400	6400
Total Base Weight Dry (lbs.)	3480	3480	3750	3610	3770	3870	3750	4010	4010	3950	4610	4680
Load Capacity (lbs.)	1520	1520	1250	1390	1730	1630	1750	1490	1490	1550	1790	1720
Dry Hitch Weight (lbs.)	300	400	410	350	340	340	380	370	360	420	750	950
Fresh Water (gal.)	30	30	30	30	30	30	30	30	30	30	30	30
Grey Water (gal.)	30	30	30	30	30	30	30	30	30	30	30	30
Black Water (gal.)	30	30	30	30	30	30	30	30	30	30	30	30
Tire Size	75R14	75R14	75R14	75R14	75R14	75R14	75R14	75R14	75R14	75R14	75R14	75R14



Dry Weights based on standard features; optional equipment not included. Carrying capacity determined by subtracting total weight from GVWR and includes fluids, options, and cargo. Liquid capacities and weights are approximate only. Due to constant product improvements, Aero Manufacturing Inc. reserves the right to make changes including but not limited to specifications, equipment and accessories without further notice or obligation.

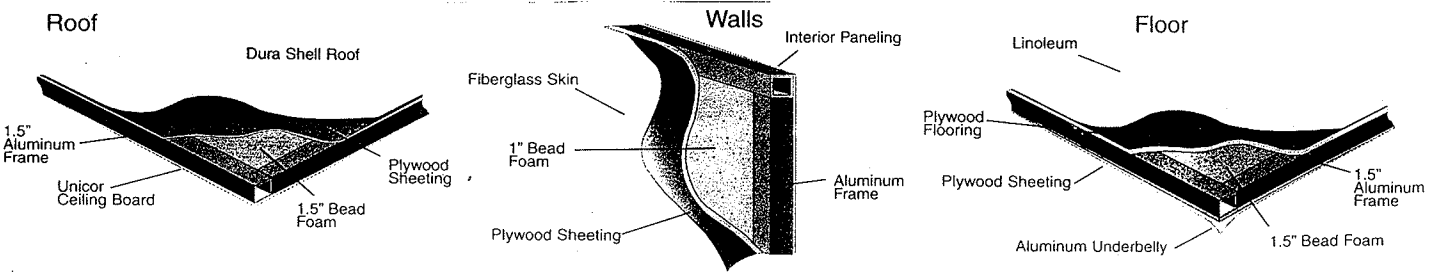


AL-KO KOBER "No-Rust" Galvanized Steel Lightweight Frames




Rubber Suspension Axle




1999 Aerolite Eight and SE Travel Trailers

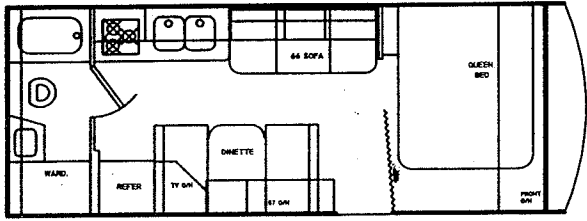


824FBR

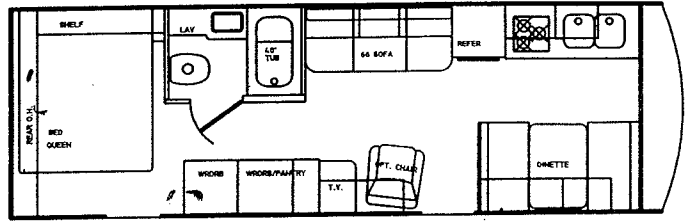


828FK (NEW)

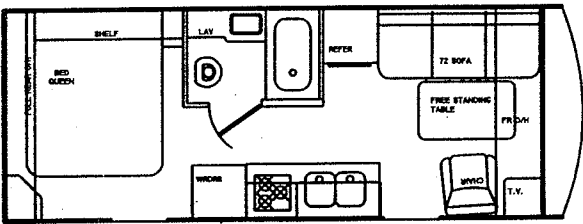


824RQS

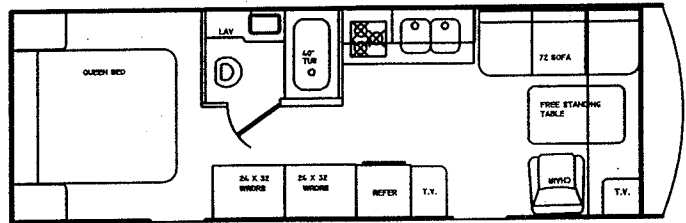


828RQS

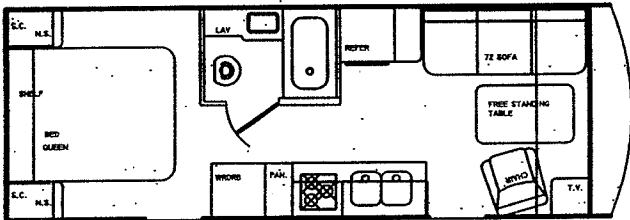


826RQS

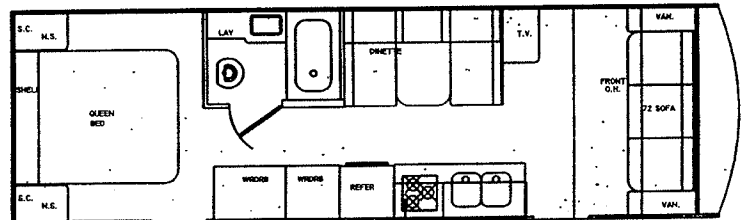


830RQS

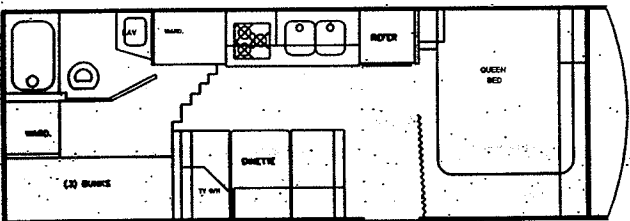


826FDB

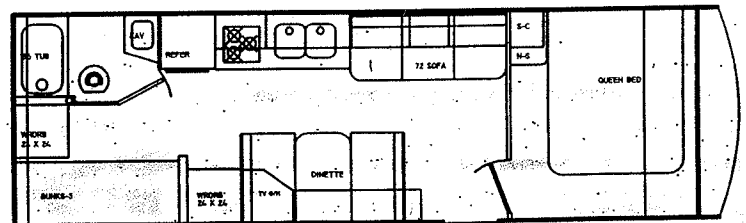

830FDB

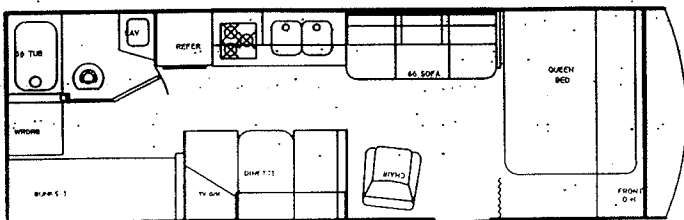

828FDB (NEW)

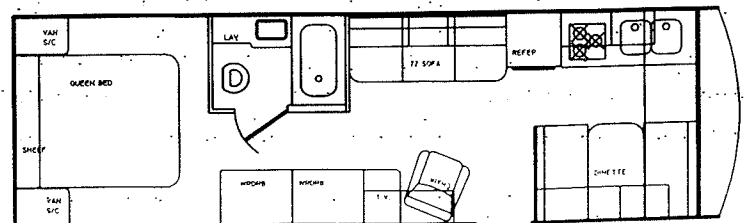

830FK